



• Swift Change Shafts

• Fully Sealed Oil Bath

• High Material Throughput

All Star Screening Bucket

11-14

Carrier Weight 11-14Ton/24000-30000lbs

Shafts 5

Weight 975Kg
2150lbs



Hydraulic Req. 70l/min 70-180bar
18.5gal/min 70-180bar

Volume 0.62m³
0.81yd³

Output Capability 45-55 TPH
58-71 YdsPH


Inside Width 1226mm
48 inches

Opening Width 1574mm
62 inches

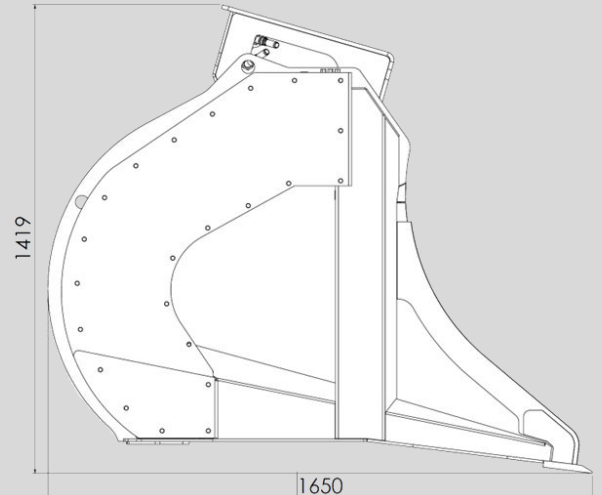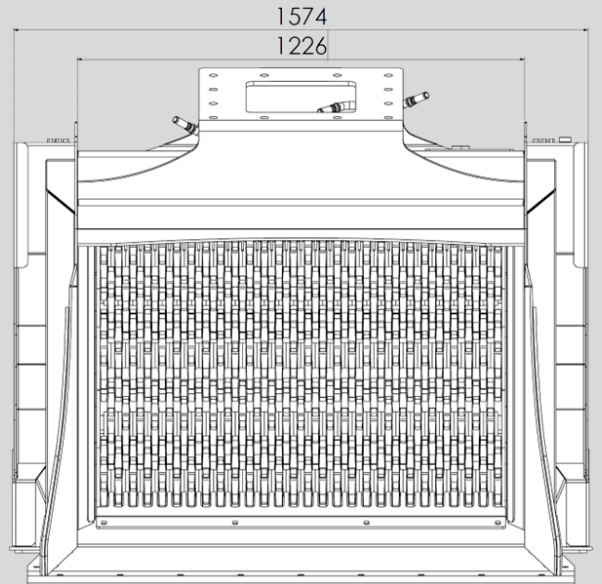

Revolutionising On Site Screening
WORLDWIDE

LESS = MORE

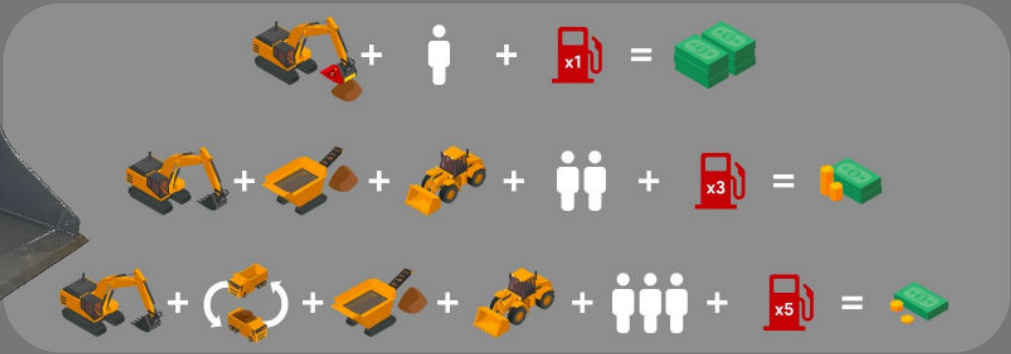

Less Plant + Less man hours + Less Fuel = MORE PROFIT!

One bucket, 6 screening options

3/8" - 10mm Optional
<ul style="list-style-type: none"> • Soils, Peat, Compost, Bagged Material Etc. • Pipe Bedding and Padding
1/2" - 15mm Optional
<ul style="list-style-type: none"> • Bagged Top soil •Top Dressings •Potting Compost • River Bank Cleaning •Gypsum
3/4" - 20mm Standard
<ul style="list-style-type: none"> • Top Soil •Peat •Stone Cleaning •Compost Mixing • Aggregate Sizing •Biomass Waste •Furnace Waste
1-1/4" - 30mm Optional
<ul style="list-style-type: none"> • Wood Chip •Golf Course Construction • Land Reclamation •Farm Land Restoration • Vegetable Cleaning
1-1/2" - 40mm Optional
<ul style="list-style-type: none"> • Scalping •Recycling •Stone Wall Restoration • Large Aggregate Screening •Plasterboard
2" - 50mm Optional
<ul style="list-style-type: none"> • Scalping •Recycling •Stone Wall Restoration • Large Aggregate Screening •Land Reclamation

