



- Swift Change Shafts

- Fully Sealed Oil Bath

- High Material Throughput

All Star Screening Bucket

4-6

Carrier Weight 4-6Ton/8800-13000lbs

Shafts 3

Weight 400Kg
881lbs



Hydraulic Req. 50l/min 70-180bar
13.2gal/min 70-180bar

Volume 0.21m³
0.28yd³

Output Capability 15-20 TPH
19-26 YdsPH


Inside Width 822mm
32 inches

Opening Width 1161mm
45.5 inches

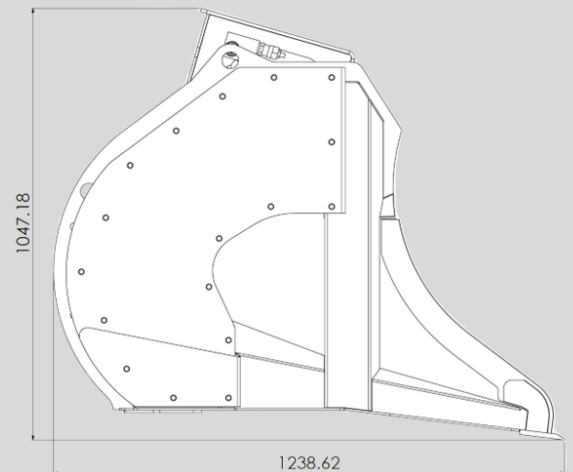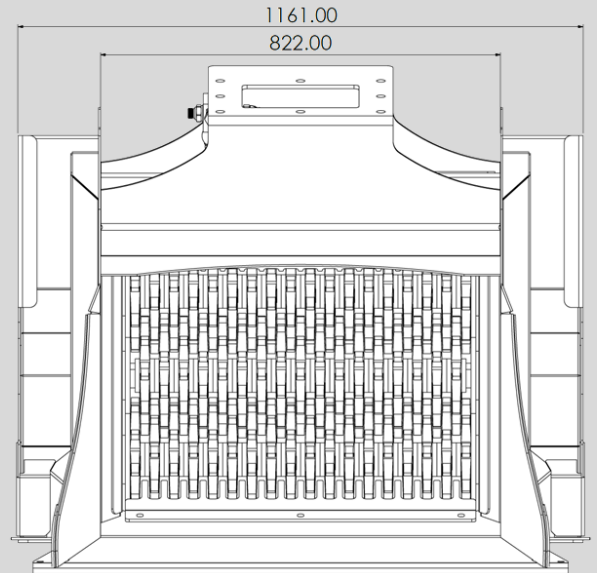

Revolutionising On Site Screening
WORLDWIDE

LESS = MORE

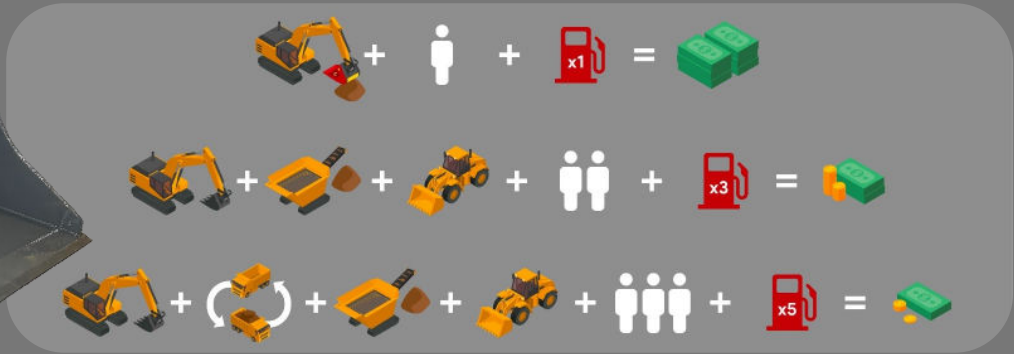

Less Plant + Less man hours + Less Fuel = MORE PROFIT!

One bucket, 6 screening options

3/8" - 10mm Optional
<ul style="list-style-type: none"> • Soils, Peat, Compost, Bagged Material Etc. • Pipe Bedding and Padding
1/2" - 15mm Optional
<ul style="list-style-type: none"> • Bagged Top soil •Top Dressings •Potting Compost • River Bank Cleaning •Gypsum
3/4" - 20mm Standard
<ul style="list-style-type: none"> • Top Soil •Peat •Stone Cleaning •Compost Mixing • Aggregate Sizing •Biomass Waste •Furnace Waste
1-1/4" - 30mm Optional
<ul style="list-style-type: none"> • Wood Chip •Golf Course Construction • Land Reclamation •Farm Land Restoration • Vegetable Cleaning
1-1 /2" - 40mm Optional
<ul style="list-style-type: none"> • Scalping •Recycling •Stone Wall Restoration • Large Aggregate Screening •Plasterboard
2" - 50mm Optional
<ul style="list-style-type: none"> • Scalping •Recycling •Stone Wall Restoration • Large Aggregate Screening •Land Reclamation

