



- Swift Change Shafts

- Fully Sealed Oil Bath

- High Material Throughput

### All Star Screening Bucket

### 7-10

**Carrier Weight** 7-10Ton/15500-22000lbs

**Shafts** 4

**Weight** 630Kg  
1388lbs



**Hydraulic Req.** 50l/min 70-180bar  
13.2gal/min 70-180bar

**Volume** 0.35m<sup>3</sup>  
0.46yd<sup>3</sup>

**Output Capability** 30-35 TPH  
39-45 YdsPH


**Inside Width** 900mm  
35 inches

**Opening Width** 1246mm  
49 inches

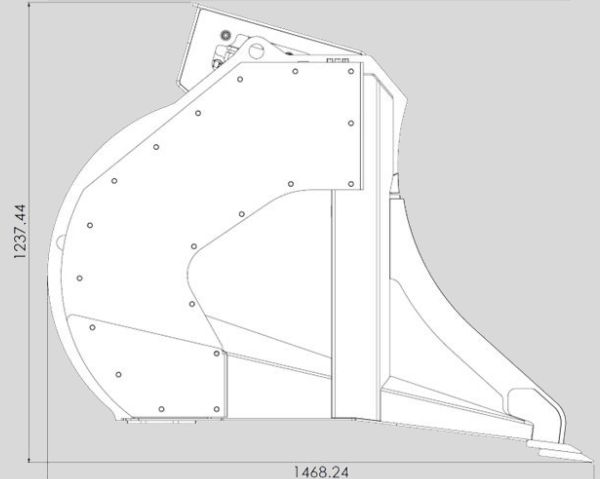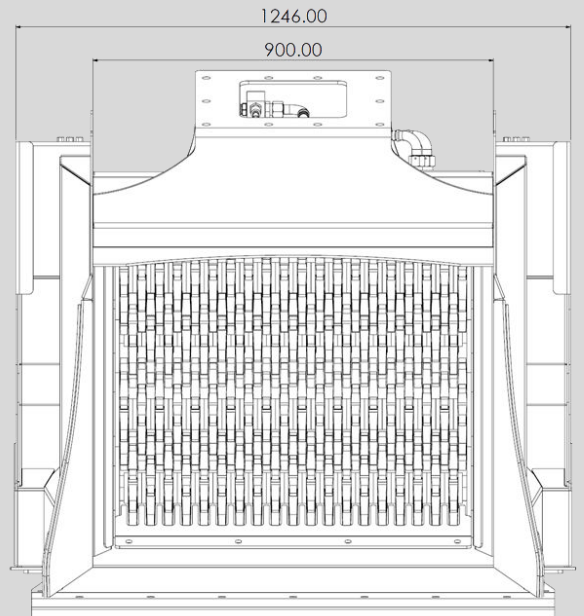

Revolutionising On Site Screening  
**WORLDWIDE**

**LESS = MORE**

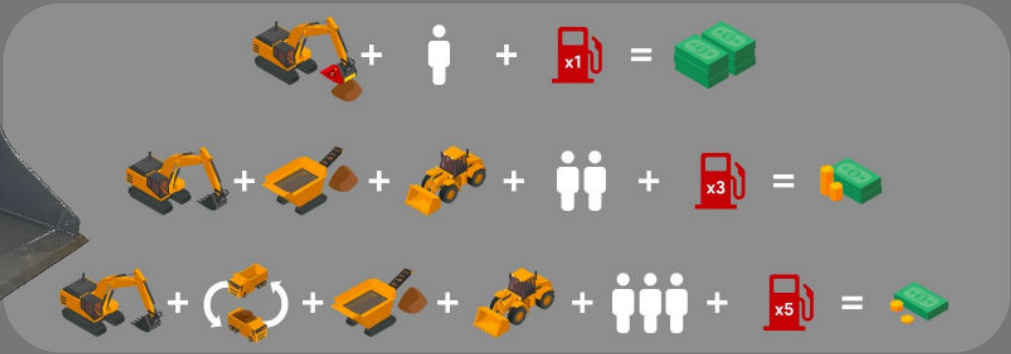

**Less Plant + Less man hours + Less Fuel = MORE PROFIT!**

**One bucket, 6 screening options**

<b>3/8" - 10mm</b> Optional
<ul style="list-style-type: none"> <li>• Soils, Peat, Compost, Bagged Material Etc.</li> <li>• Pipe Bedding and Padding</li> </ul>
<b>1/2" - 15mm</b> Optional
<ul style="list-style-type: none"> <li>• Bagged Top soil    •Top Dressings    •Potting Compost</li> <li>• River Bank Cleaning    •Gypsum</li> </ul>
<b>3/4" - 20mm</b> Standard
<ul style="list-style-type: none"> <li>• Top Soil    •Peat    •Stone Cleaning    •Compost Mixing</li> <li>• Aggregate Sizing    •Biomass Waste    •Furnace Waste</li> </ul>
<b>1-1/4" - 30mm</b> Optional
<ul style="list-style-type: none"> <li>• Wood Chip    •Golf Course Construction</li> <li>• Land Reclamation    •Farm Land Restoration</li> <li>• Vegetable Cleaning</li> </ul>
<b>1-1 /2" - 40mm</b> Optional
<ul style="list-style-type: none"> <li>• Scalping    •Recycling    •Stone Wall Restoration</li> <li>• Large Aggregate Screening    •Plasterboard</li> </ul>
<b>2" - 50mm</b> Optional
<ul style="list-style-type: none"> <li>• Scalping    •Recycling    •Stone Wall Restoration</li> <li>• Large Aggregate Screening    •Land Reclamation</li> </ul>

