
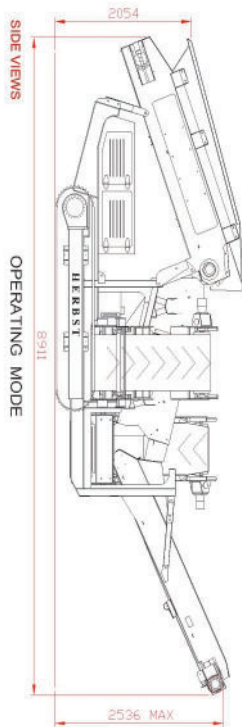
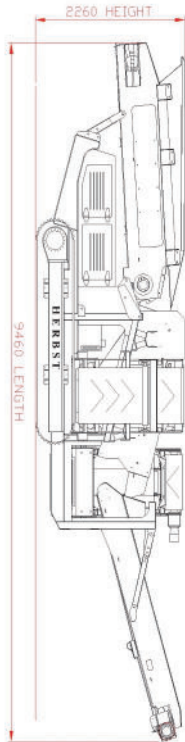
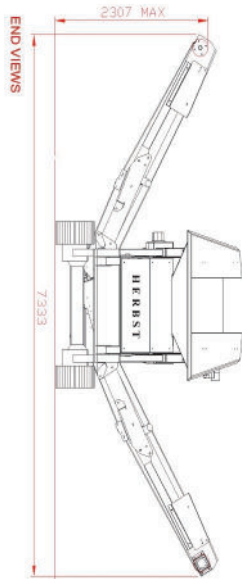


## DIMENSIONS



**HERBST MACHINERY LTD**

120 Drumnakilly Road,  
Omagh, Co. Tyrone, N. Ireland. BT79 0JT

**Tel:** +44 (0)28 8077 1568

**Fax:** +44 (0)28 8077 1569

**General:** info@herbst.co.uk

**Sales:** ashley@herbst.co.uk

**Spare Parts:** stores@herbst.co.uk



Available Worldwide

Contact us for Nearest Agent

S52



## Product Leaflet




*Compac*

**S52  
Tracked Screen**

[www.herbstmachinery.com](http://www.herbstmachinery.com)

[www.herbstmachinery.com](http://www.herbstmachinery.com)

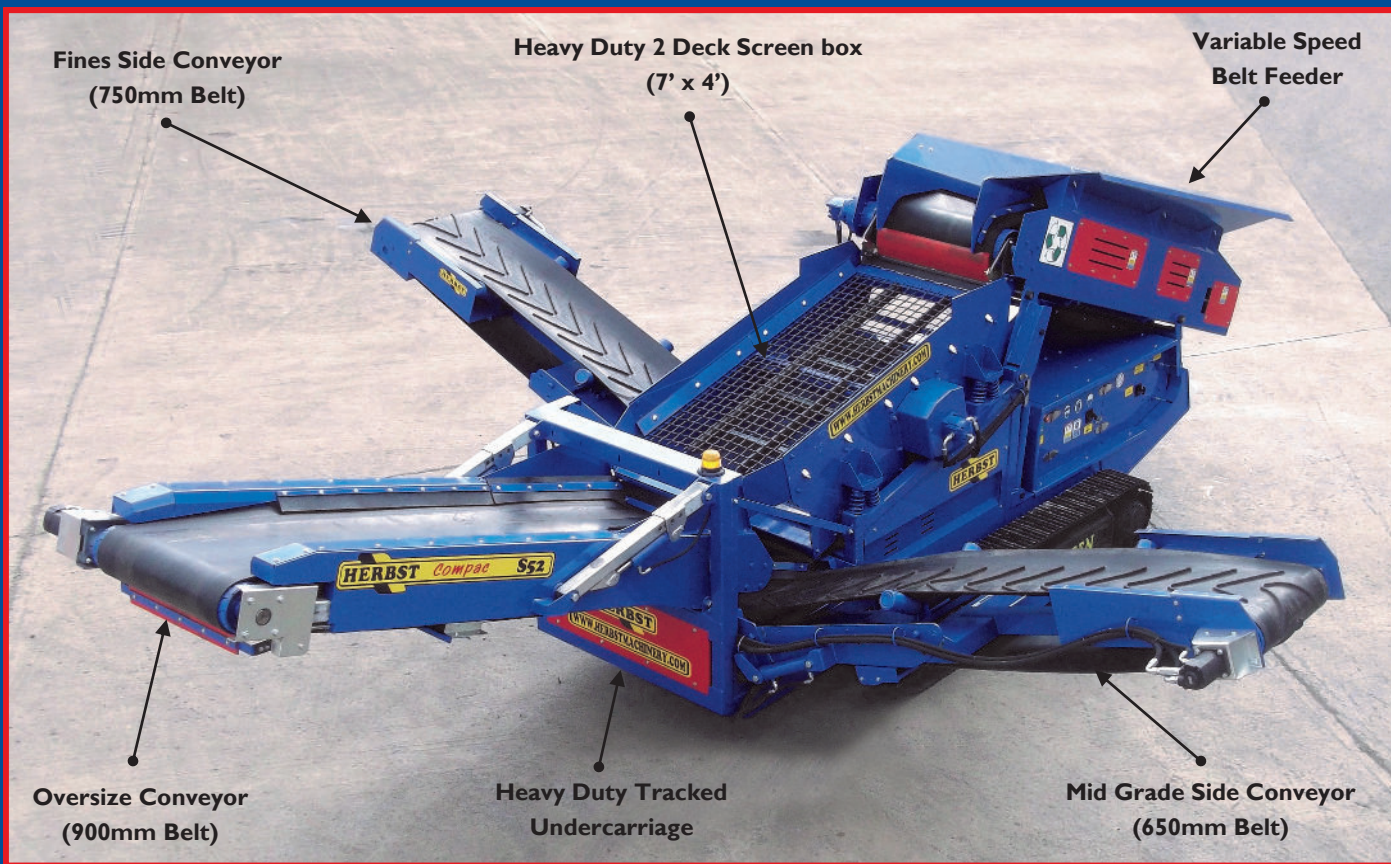

## FEATURES & BENEFITS

- 4 cylinder Air Cooled Tier III Diesel Engine— Net Engine Power of 40kW.
- An efficient, diesel powered Hydraulic system throughout.
- Variable speed belt feeder
- Hydraulically folding conveyors with excellent stockpiling capacity
- High performance 2 deck screen box  
Size of Top Deck—7' x 4'
- Performance — Up to 250 Tonne/Hour
- Dog lead control
- Designed to fold up and track into a standard shipping container
- Designed for a wide range of materials and aggregates

## OPTIONS

- Grizzly, Bofar Bar on Top Deck
- Other Options: - Punch Plate
- Cordless radio remote track control
- Dust suppression kit
- Customised Colour

The **Herbst Compac S52** is a robust and versatile screener with a high performance 2 deck screen box, designed for a wide range of materials and aggregates. With hydraulically folding conveyors and unique compact build, the screen can be folded up and tracked directly into a standard shipping container in just a few minutes. The forward facing, aggressive screening box is capable of processing up to 250 Tonne / Hour, and can be adapted for a variety of applications, including Recycling, Demolition, Crushed stone, Sand & Gravel, Soil & Compost. The screen has unrivalled mobility, allowing effortless transportation from site to site.



**Protective Roller for Loading & Off Loading**  
Patent Applied for  
no. 1209651.7



## HERBST COMPAC S52

Unladen Weight (Kg)	10,300
Transport Length (mm)	9460 (31'1")
Transport Width (mm)	2270 (7'6")
Transport Height (mm)	2260 (7'5")
Working Length (mm)	8911 (29' 3")
Working Width (mm)	7333 (24'0")
Working Height (mm)	2536 (8'4")
Screen Unit (mm)	2135 x 1220 (7' x 4')